



Click & clean Decentral satellite FFR

The most hygienic, robust and reliable cleaning satellite on the market.

The Click & clean decentral satellite is available in wall mounted or mobile version.

With a single lever the operator can change between the different medias. Only compressed air, water to be connected to the unit.

Functions:

- Foam cleaning
- Foam disinfection
- Clear water rinse

Click & clean Decentral units are standard equipped with:

Ref. 100.201

- Stainless steel Maintenance free selector valve for water, chemicals and air.
- 2 separated chemical injectors with adjustable dosing ratio (0.15-15%) who makes it impossible to mix-up chemicals.
- Air regulator.
- Air manometer.
- Lockable stainless steel cabinet, with sloped top cover for optimal hygiene.
- 2 x stainless steel check valves on chemical suction with Extreme Kalrez seals for excellent chemical resistance.
- 1 x stainless steel check valve for air supply protection.
- 1 x Check valve with detector when first check valve is failing.
- 1 x bleu suction kit with filter and PVC pipe for foam cleaning chemical.
- 1 x yellow suction kit with filter and PVC pipe for foam disinfectant chemical.
- Set Of 8 dosing tips.

Mobile version is extra equipped with:

Ref. 100.201XM

Click & clean decentral satellite FFR (See here above).

Stainless steel heavy duty trolley

2 x big wheels on the back

2 x swivel wheels with brake in the front.

Container holder for 2 x 25 liter cans.

Stainless steel automatic spring driven hose reel.

20 meter 5 layer hose with textile reinforcements, Foodflex hose, FDA approved.

Max. 50bar /70°C.

Stainless steel isolated ball valve with integrated "3 in 1" triple click nozzle.

Yellow suction hose for disinfection Chemical.

Bleu suction hose for foam cleaning chemical.

Set of 8 dosing tips.

Wall mounted version



Mounting example.
Hose reel and accessories not included.


Mobile version






Technical data:

Technical specifications decentral satellite:	
Water connection	1/2" BSP 60°
Water pressure	6 - 200 bar
Water temperature	0 - 90°C.
Air connection	1/2" BSP 60°
Air pressure	5 - 10 bar
Basic functions	<ul style="list-style-type: none"> • Foam cleaning • Foam Disinfection • Clean water rinse
Chemical injectors	2 - 100% separated
Dosing ratio	0.15 - 15%
Materials	Stainless steel
Dimensions (HxWxD):	400 x 400 x 210 mm.

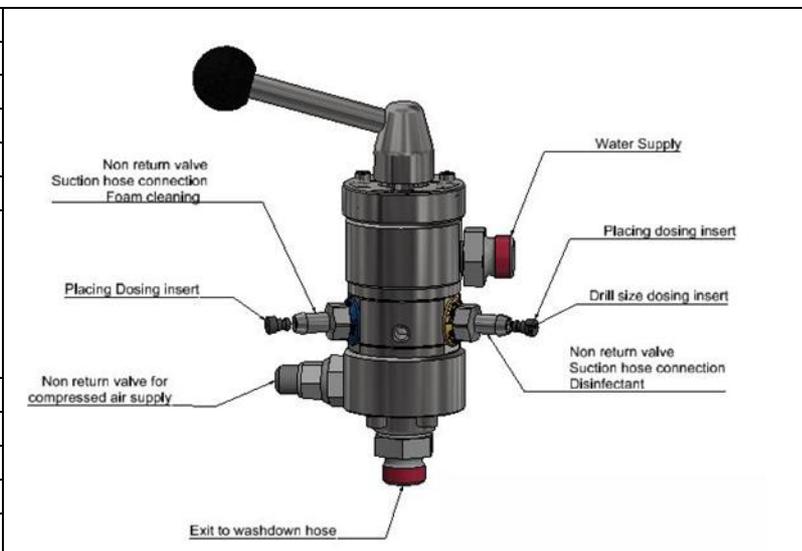


Connection and use Click & clean decentral FFR satellite (wall mounted version).

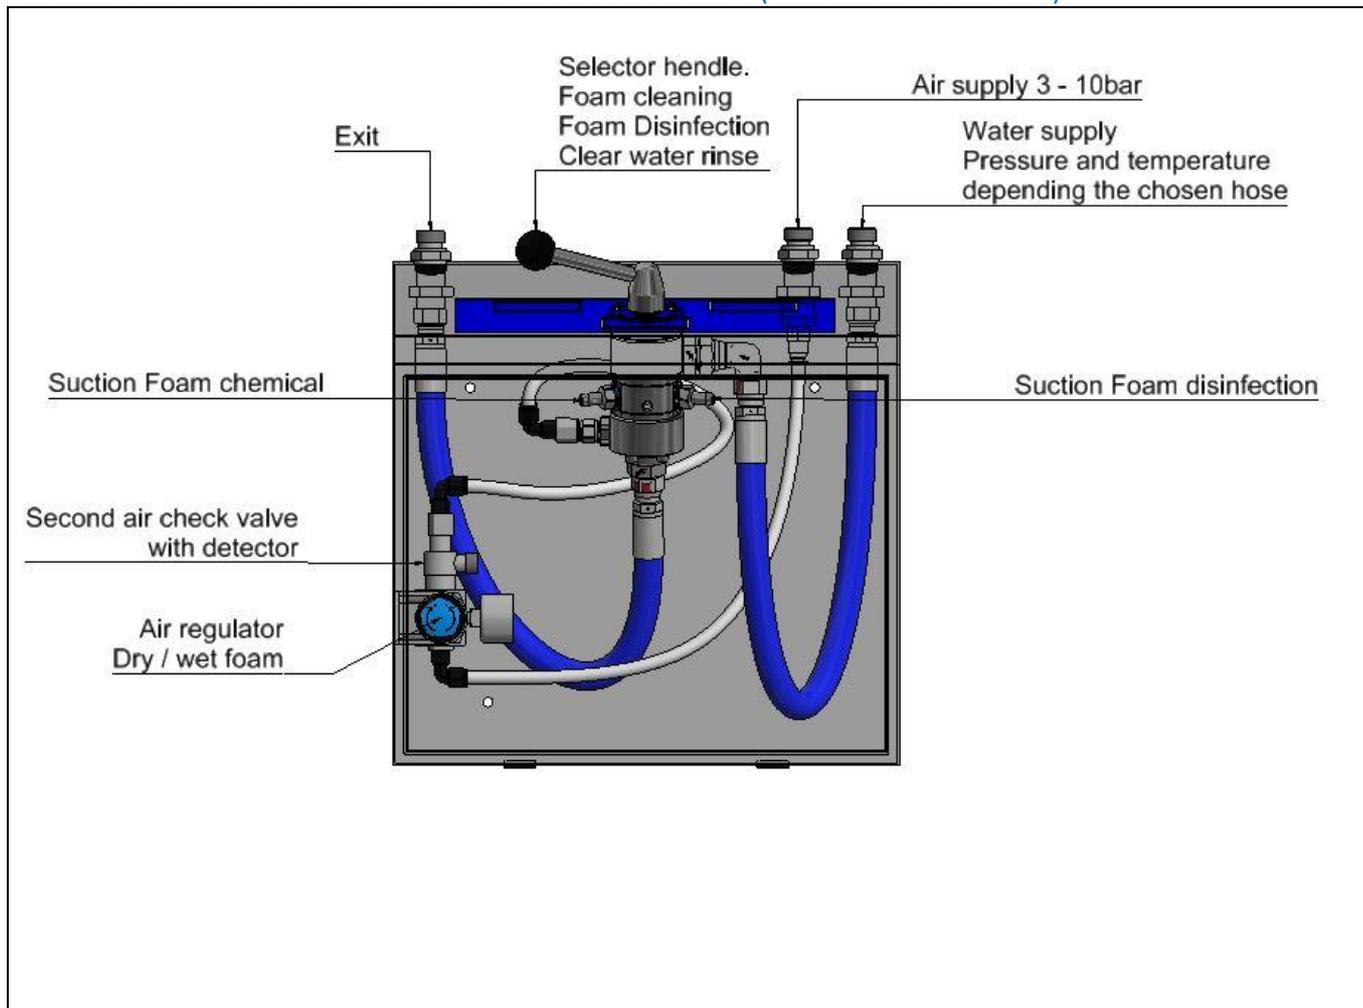



Wall Mounting example satellite

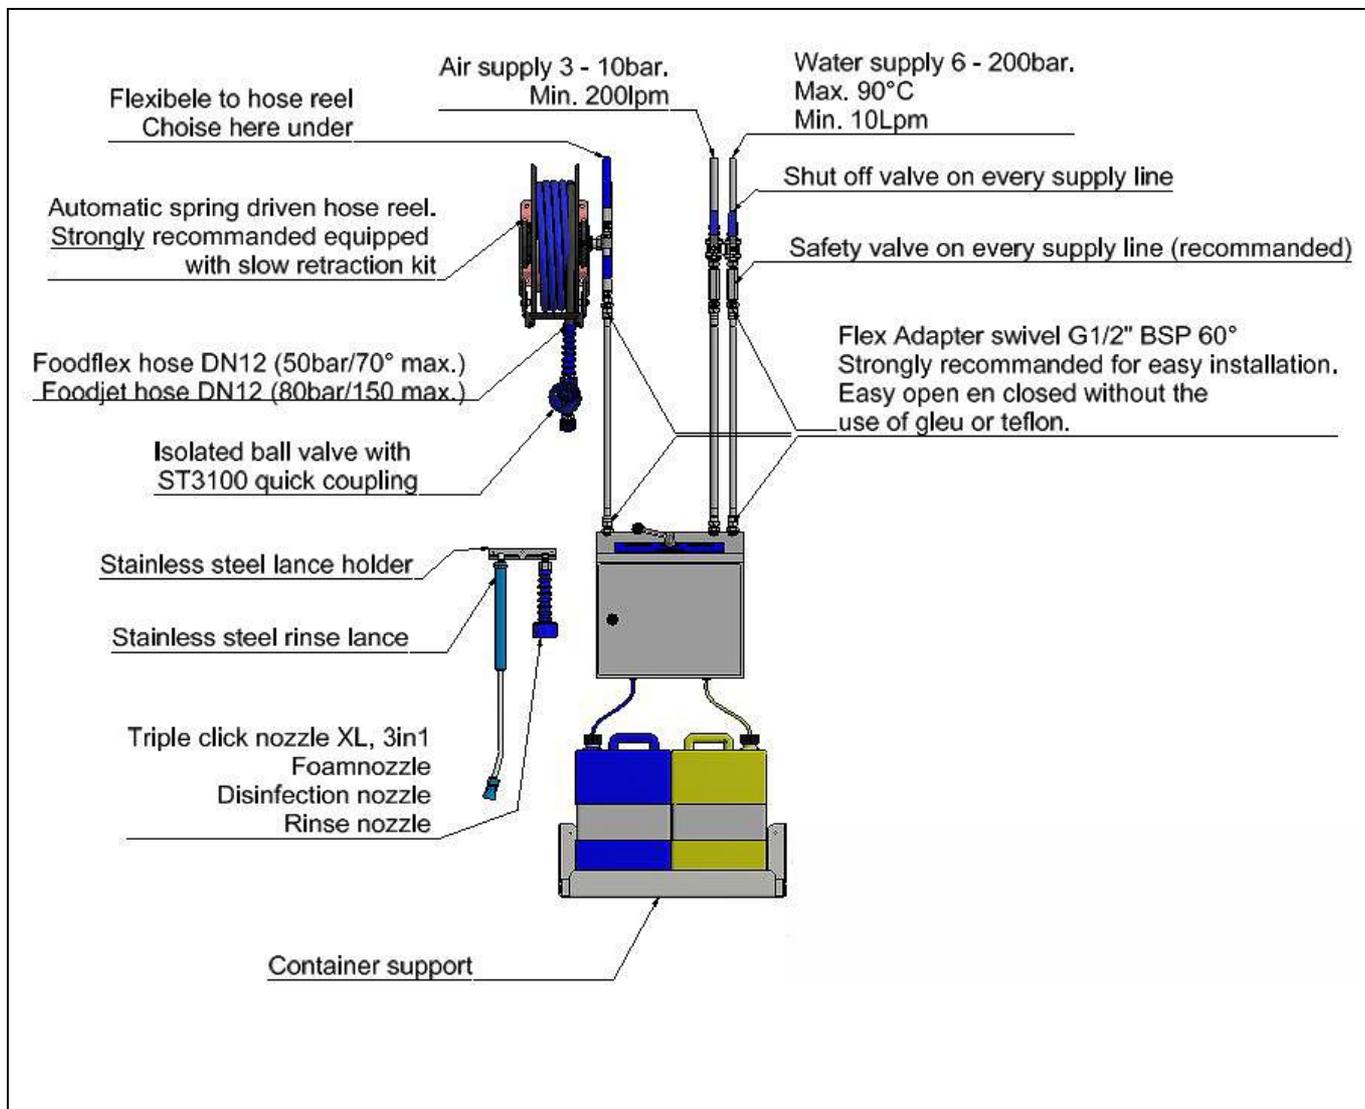

Hose lengths depend on the water pressure and water flow.

Foam quality can reduce to the length of the hose.

- 6 – 15 bar: Max. 20meter.
- 16 – 25bar: Max. 30 meter.
- 26 – 50bar: Max. 35 meter.



Most common accessories for wall mounted versions:

<p>Stainless steel automatic spring loaded hose reels with optional wall swivel. Let the hose reel turn 180° on the wall. Standard version 200bar / 90°C. Optional in 400 or 600 bar version.</p> <p>Available lengths for Click & clean satellite FFR</p> <table border="1" data-bbox="151 566 1023 734"> <thead> <tr> <th colspan="2">Available lengths hose reels for satellites</th> <th>Wall swivel</th> </tr> </thead> <tbody> <tr> <td>Ref. 260.AV 1000</td> <td>15 meter ½" hose.</td> <td>Ref. 260.ST15</td> </tr> <tr> <td>Ref. 260.AV 1100</td> <td>20 meter ½" hose.</td> <td>Ref. 260.ST20</td> </tr> <tr> <td>Ref. 260.AV 3400</td> <td>25 meter ½" hose.</td> <td>Ref. 260.ST34</td> </tr> <tr> <td>Ref. 260.AV 3500</td> <td>35 meter ½" hose.</td> <td>Ref. 260.ST30</td> </tr> </tbody> </table> <p>Hoses are not included.</p>	Available lengths hose reels for satellites		Wall swivel	Ref. 260.AV 1000	15 meter ½" hose.	Ref. 260.ST15	Ref. 260.AV 1100	20 meter ½" hose.	Ref. 260.ST20	Ref. 260.AV 3400	25 meter ½" hose.	Ref. 260.ST34	Ref. 260.AV 3500	35 meter ½" hose.	Ref. 260.ST30	
Available lengths hose reels for satellites		Wall swivel														
Ref. 260.AV 1000	15 meter ½" hose.	Ref. 260.ST15														
Ref. 260.AV 1100	20 meter ½" hose.	Ref. 260.ST20														
Ref. 260.AV 3400	25 meter ½" hose.	Ref. 260.ST34														
Ref. 260.AV 3500	35 meter ½" hose.	Ref. 260.ST30														
<p>Ref. 260.KIT BK Slow retraction kit for automatic spring driven hose reels. Prevents the hose from quickly rewinding on the hose reel. Safety for user product and environment.</p> <p>Video: https://www.youtube.com/watch?v=FGGcD6xZ10s</p>																
<p>Foodflex PVC wash down hoses. 5 Layer hose with textile reinforcement. FDA Approved. Max. 50Bar / 70°C. Hoses are standard equipped with stainless steel ½" MF adapters and ferrules.</p> <table border="1" data-bbox="151 1171 1023 1339"> <tbody> <tr> <td>Ref.30350X1,5</td> <td>1,5 meter(connection satellite and hose reel)</td> </tr> <tr> <td>Ref. 30350X15</td> <td>15 meter length.</td> </tr> <tr> <td>Ref. 30350X20</td> <td>20 meter length.</td> </tr> <tr> <td>Ref. 30350X25</td> <td>25 meter length.</td> </tr> <tr> <td>Ref. 30350X35</td> <td>35 meter length.</td> </tr> </tbody> </table>	Ref.30350X1,5	1,5 meter(connection satellite and hose reel)	Ref. 30350X15	15 meter length.	Ref. 30350X20	20 meter length.	Ref. 30350X25	25 meter length.	Ref. 30350X35	35 meter length.						
Ref.30350X1,5	1,5 meter(connection satellite and hose reel)															
Ref. 30350X15	15 meter length.															
Ref. 30350X20	20 meter length.															
Ref. 30350X25	25 meter length.															
Ref. 30350X35	35 meter length.															
<p>Foodjet Rubber wash down hose 5 Layer hose with textile reinforcement. Max. 80Bar / 150°C. Hoses are standard equipped with stainless steel ½" MF adapters and ferrules.</p> <table border="1" data-bbox="151 1494 1023 1662"> <tbody> <tr> <td>Ref.30360X1,5</td> <td>1,5 meter(connection satellite and hose reel)</td> </tr> <tr> <td>Ref. 30360X15</td> <td>15 meter length.</td> </tr> <tr> <td>Ref. 30360X20</td> <td>20 meter length.</td> </tr> <tr> <td>Ref. 30360X25</td> <td>25 meter length.</td> </tr> <tr> <td>Ref. 30360X35</td> <td>35 meter length.</td> </tr> </tbody> </table>	Ref.30360X1,5	1,5 meter(connection satellite and hose reel)	Ref. 30360X15	15 meter length.	Ref. 30360X20	20 meter length.	Ref. 30360X25	25 meter length.	Ref. 30360X35	35 meter length.						
Ref.30360X1,5	1,5 meter(connection satellite and hose reel)															
Ref. 30360X15	15 meter length.															
Ref. 30360X20	20 meter length.															
Ref. 30360X25	25 meter length.															
Ref. 30360X35	35 meter length.															
<p>Ref. 140.113 Isolated stainless steel ball valve with integrated "3in1" triple click nozzle. This system prevents nozzles from being lost if they have to be changed when rinsing, foaming or disinfecting. Here no use is made of quick couplings where O rings have to be replaced frequently. With this system nozzles are fixed on the valve and cannot be removed. Insulated against heat and shock resistant.</p>																



<p>Ref.140.114 Isolated stainless steel ball valve with ST3100 quick coupling. Max. 60bar/90°C. For users who want to work with triple click nozzle (XL version) and need to switch to long rinse lance in some cases.</p>																			
<table border="1"> <thead> <tr> <th>Ref.</th> <th>Color</th> <th>Type</th> <th>Nozzle</th> </tr> </thead> <tbody> <tr> <td>140.155</td> <td>white</td> <td>Foam Nozzle</td> <td>50/200</td> </tr> <tr> <td>140.160</td> <td>Blue</td> <td>Rinse nozzle</td> <td>15/30</td> </tr> <tr> <td>140.165</td> <td>Yellow</td> <td>Disinfection spray nozzle</td> <td>25/50</td> </tr> </tbody> </table> <table border="1"> <tr> <td>140.655</td> <td>Stainless steel nozzle holder</td> </tr> </table>	Ref.	Color	Type	Nozzle	140.155	white	Foam Nozzle	50/200	140.160	Blue	Rinse nozzle	15/30	140.165	Yellow	Disinfection spray nozzle	25/50	140.655	Stainless steel nozzle holder	
Ref.	Color	Type	Nozzle																
140.155	white	Foam Nozzle	50/200																
140.160	Blue	Rinse nozzle	15/30																
140.165	Yellow	Disinfection spray nozzle	25/50																
140.655	Stainless steel nozzle holder																		
<p>Ref. 140.145XL Stainless steel triple click nozzle (3in1) equipped with short lance and ST3100 quick adapter.</p>																			
<p>Ref. 40.2300.60 Stainless steel lance 1000mm with isolation and nozzle protector with ST3100 quick adapter. Nozzle not included.</p>																			
<p>Ref. 270.110 Stainless steel heavy duty wall support for 2 x 25liter canisters.</p>																			

Mounting equipment:

<p>Ref. DKR12G12D18 Flex adapter. Max. 250bar/150°C. Stainless steel adapter with on 1 side G1/2" swivel BSP 60° conical and on other side Ø18mm stainless steel pipe. The pipe can be welded, crimped or connected with bi-conic adapters. The swivel adapts to ½" BSP 60° nipples without any glue, sealants or Teflon.</p>	
<p>Ref. 200264540 Stainless steel non return valve. ½" F in/out. Max. 400bar/90°C.</p>	



Mobile Click & clean satellite.

The mobile click & clean satellite is standard equipped with:

- Click & clean decentral satellite FFR.
- Stainless steel heavy duty trolley.
- 2 x big wheels on the back
- 2 x swivel wheels with brake in the front.
- Container holder for 2 x 25 liter cans.
- Stainless steel automatic spring driven hose reel.
- 20 meter 5 layer hose with textile reinforcements, Foodflex hose, FDA approved. Max. 50bar /70°C.
- Stainless steel isolated ball valve with integrated "3 in 1" triple click nozzle.

